

ENCLOSURE HEATER

LTS 064 | 20 W to 40 W




- > Clip fixing and pressure clamp for quick mounting
- > Low surface temperature
- > Earthed plastic casing
- > Wide voltage range
- > Heater body in loop design for optimal temperature distribution
- > Shock and vibration proof

Compact heater for the protection of electrical and electronic components in enclosures. Its design ensures great convection resulting in excellent heat dissipation. A touch-safe plastic cover provides for low surface temperatures on the side of the device. The practical push-in clamping terminal enables quick and easy electrical connection. The heaters are designed for continuous operation.




TECHNICAL DATA

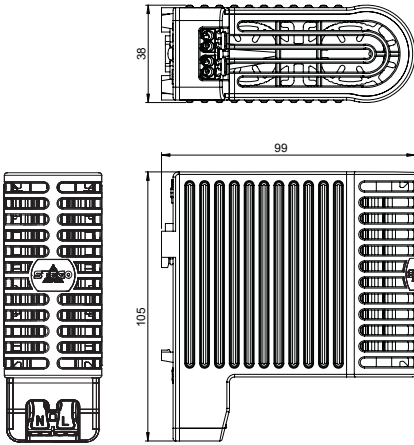

Operating voltage	AC/DC 120 –240 V (min. 110 V, max. 265 V)
Heating element	PTC resistor – temperature limiting
Surface temperature	< +80 °C (+176 °F), except upper protective grille
Connection	2 x pressure clamps for stranded wire 0.5 - 1.5 mm ² (with wire end ferule) and rigid wire 0.5 – 2.5 mm ²
Casing	plastic according to UL94 V-0, black and white
Dimensions	105 x 38 x 99 mm
Mounting	clip for 35 mm DIN rail, EN 60715
Fitting position	vertical airflow (air outlet up, connection on bottom)
Operating/Storage temperature	-45 °C to +70 °C (-49 °F to +158 °F)
Operating/Storage humidity	< 90 % RH (non-condensing)
Protection type/Protection class	IP20 / II (double insulated)
Approvals	VDE UL File No. E234324 EAC DIN EN 60068-2-27:2010-02 DIN EN 60068-2-64:2009-04 in connection with DIN EN IEC 61373:2011-04, Cat. 1 B
Note	other voltages on request

Example of connection

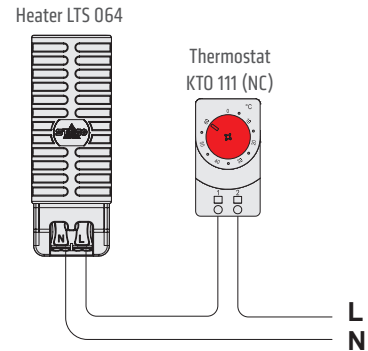

Art. No.	Heating capacity ¹	Inrush current max.	Recommended pre-fuse T (time-delay)	Weight (approx.)
06401.0-00	20 W	2.0 A	4.0 A	0.2 kg
06402.0-00	30 W	2.0 A	4.0 A	0.2 kg
06403.0-00	40 W	4.0 A	6.0 A	0.2 kg

¹ at +20 °C (+68 °F) ambient temperature